

# Software

## Survey Master

Compatible with most of Android devices

Easier survey workflow via Wizard function

Support up to 120° IMU tilt compensation


Support all survey modes, including Static, PPK and RTK

Support Surface Stake, Mapping Survey and etc. to serve various survey tasks


Support CAD import and directly use for stake out operations

Support Convert function from ComNavBinary raw file to RINEX


Optional



Laser Visual Surver&Stakeout

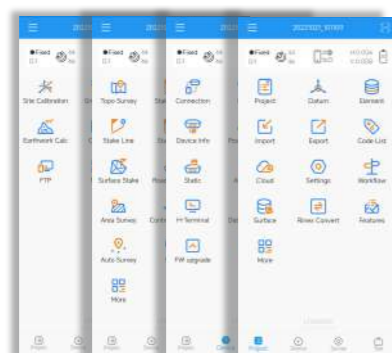

New Interface

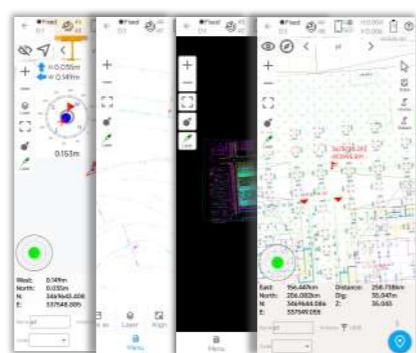

CAD Basemap and Stake

## Post-processing Software

### SinoGNSS Compass solution software



Provide the complete GPS/GLONASS/BeiDou/GALILEO post-processing solution

Support GNSS observation data in RINEX and ComNav Raw Binary Data format

Support different post-processing in static and kinematic modes

Output analysis reports in various formats (web format, DXF, TXT, KML)

Supports DJI's UAV data format. Processing results can be imported into photogrammetry and 3D modeling software directly

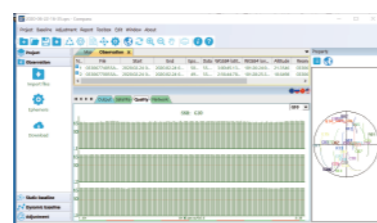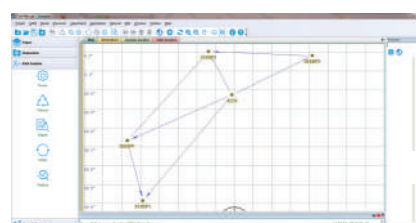

# Jupiter GNSS Receiver

GNSS Surveying System

Ver.2024.08.21

## Signal Tracking

Channel: 1668  
 GPS: L1C/A, L1C, L2P, L2C, L5  
 BDS: B1I, B2I, B3I, B1C, B2a, B2b  
 GLONASS: L1, L2, L3  
 Galileo: E1, E5a, E5b, E6c, E5 AltBOC  
 QZSS: L1C/A, L2C, L5, L1C, L6  
 IRNSS: L5  
 SBAS: L1C/A  
 L-Band<sup>1</sup>  
 PPP: B2b&Has

## Performance Specification

Signal Re-acquisition: ≤1s  
 Cold Start: ≤30s  
 Hot Start: ≤10s  
 RTK Initialization Time: <5s(Baseline≤10km)  
 Initialization Reliability: ≥99.99%  
 Data Update Rate: 1Hz, 2Hz, 5Hz, 10Hz, 20Hz

Mode	Accuracy
Static and Fast Static	Horizontal 2.5 mm + 0.5 ppm RMS Vertical 5 mm + 0.5 ppm RMS
Long Observations Static	2.5 mm + 0.1 ppm Horizontal 3.5 mm + 0.4 ppm Vertical
Signal Baseline RTK	Horizontal 8mm + 1ppm RMS Vertical 15mm + 1ppm RMS
DGPS	<0.4m RMS
SBAS	Horizontal 0.5 RMS Vertical 0.8 RMS
Standalone	1.5m 3D RMS
Laser Tilt Measurement	≤3.5cm (5m range, ≤60°Tilt in Laser mode)
PPP	Horizontal 10cm Vertical 20cm
RTK-Keep	Horizontal RTK+ 10mm/minutes RMS Vertical RTK+ 20mm/minutes RMS

## Data Format

Correction Data I/O: RTCM2.X, 3.X,CMR(GPSonly),CMR+(GPSonly)  
 Position Data Output: - ASCII: NMEA-0183 GSV, RMC, HDT, GGA, GSA, ZDA, VTG, GST; PTNL, PJK; PTNL, AVR; PTNL, GK  
 -ComNav Binary update to 20 Hz

## Electrical and Battery

Voltage: 7.2V  
 Li-ion Battery Capacity: 5000mAh  
 Power Consumption: 1.8W<sup>4</sup>

1. PPP Service is optional.
2. UHF modem is default configuration and it can be removed according to your specific needs.
3. Working distance of internal UHF varies in different environments and also depends on the protocols. With SNLonglink, 15km working range is achievable under ideal conditions.
4. Power consumption will increase when transmitting corrections via internal UHF.
5. Memory is expandable.

Working Time: 24h  
 Interface: Type-C  
 Memory: 8 GB<sup>5</sup>

## Communication

1 Serial port: Baud rates up to 921,600 bps  
 Datalink<sup>2</sup>:  
 - Tx/Rx with full frequency range from 410-470MHz  
 - Transmit power: 0.5W, 1W, 2W adjustable  
 - Air Baud Rate: 9600 / 19200 adjustable  
 - Range<sup>3</sup>: 3-15 km  
 - Protocol type: Compatible with all the ComNavTech GNSS Receiver, support Transparent/TT450S/South/Mac/SNLonglink WIFI/4G modem  
 - LTE-FDD:  
 B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28  
 - LTE-TDD: B38/B39/B40/B41  
 - WCDMA: B1/B2/B4/B5/B6/B8/B19  
 - GSM: B2/B3/B5/B8  
 Position data output rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz  
 2 LEDs (indicating Satellites Tracking and RTK Corrections data)  
 Bluetooth<sup>@</sup>: V 4.0 protocol, compatible with Windows OS and Android OS 5.2, 2.4 GHz  
 Auto-IMU integrated for tilt survey, up to 120°tilt with 2.5 cm accuracy

## Environmental Specification Working

Temperature: -40 C to +75 C (-4°F to 167°F)  
 Storage Temperature:-40 C to +85 C (-40°F to 185°F)  
 Humidity: 100% non-condensing  
 Water- & Dustproof: IP68  
 Shock: MIL-STD-810G, Survive a 2m drop onto the concrete

## Physical Specification

Housing Material: Aluminium magnesium alloy  
 Dimension: Φ 13.35 cm x 6.6 cm  
 Weight: ≤0.85 kg with two batteries

## Laser Specification

Range: 50m  
 Accuracy(room temperature): (3-5)mm + 1ppm  
 Measuring Frequency: Classic Value: 3Hz  
 Maximum Value: 5Hz  
 Laser Injection Power: 0.9mW~1.5mW  
 Working Temperature: -20 C ~+50 C  
 Storage Temperature: -30 C ~+60 C


## Cameras

Sensor pixels: 2 cameras with 2 MP global shutter, Night Vision HD  
 Field of view: 75° wide angle  
 Video frame rate: 30 fps  
 Image group capture:  
 - Method: video photogrammetry. Rate: typically 2 Hz, up to 25Hz  
 - Max. capture time: 60s with an image group size of appr. 60MB

## ComNav Technology Ltd.

Building 2, No. 618 Chengliu Middle Road,  
 201801 Shanghai, China

Tel : +86 21 64056796  
 Fax: +86 21 54309582  
 Email: sales@comnavtech.com  
 www.comnavtech.com

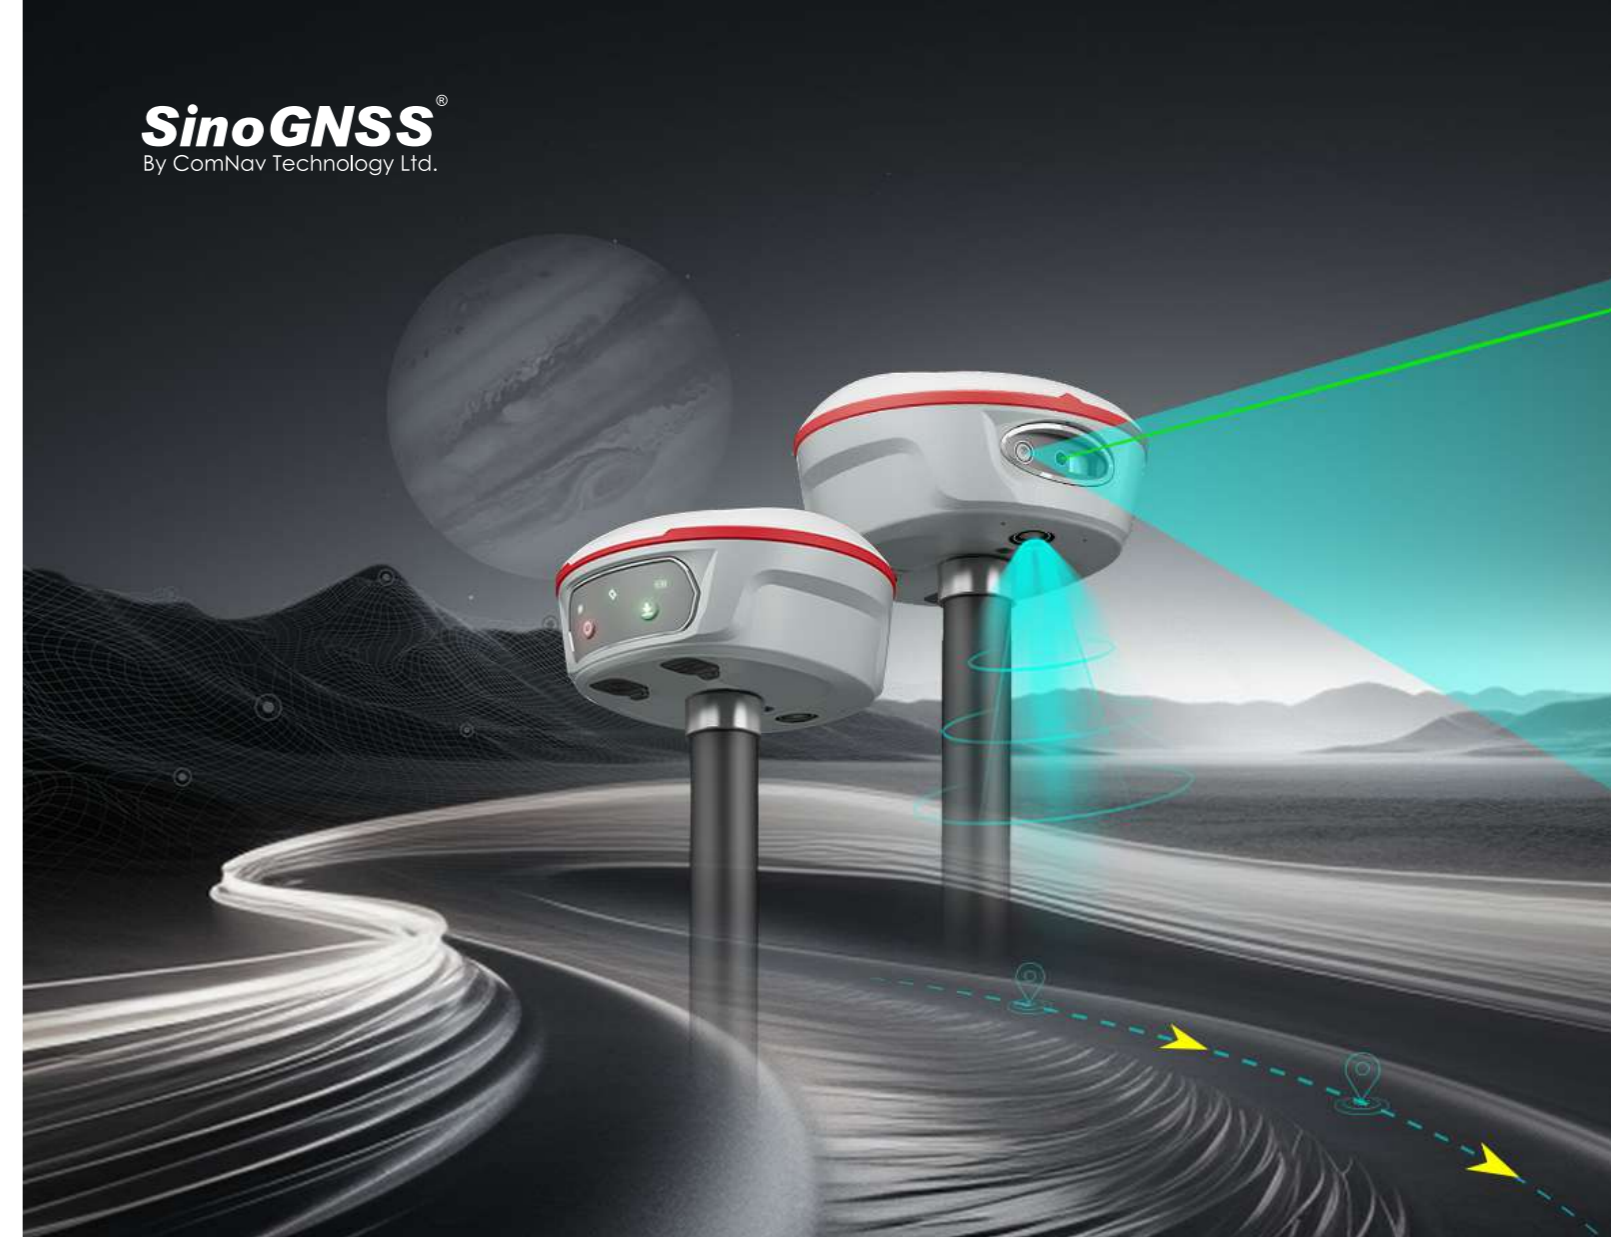

# Jupiter Laser Visual RTK

## Universe Series GNSS Receiver

LASER RTK - INNOVATION MAKES A DIFFERENCE

# Features


## Seamless Fusion of Laser & Dual-Camera for Next-Level Surveying & Stakeout

Jupiter, an IMU GNSS receiver with advanced laser sensor and dual-camera technologies, is one of the most highly-configured measurement tools on the market. Whether used for surveying or stakeout, it delivers an immersive user experience.

SATELLITE TRACKING			SATELLITE TRACKING		
	GPS	L1C/A, L1C, L2P, L2C, L5		QZSS	L1C/A, L2C, L5, L1C
	BDS	B1I, B2I, B3I, B1C, B2a, B2b		IRNSS	L5
	GLONASS	L1, L2, L3		SBAS	L1C/A
	Galileo	E1, E5a, E5b, E6c, E5 AltBOC			


### Laser Technology

Jupiter's precise green laser, visible even in daylight, enables accurate measurement of points where using range pole is not feasible. Additionally, the built-in camera overcomes the challenge of targeting points that are too distant to be seen with naked eyes, making field operations faster and more efficient.



### Visual Stakeout

With Jupiter's camera, surveyors gain a 3D visual view on Survey Master software. By simply following the directional arrow and real-time distance, with the stakeout point marked directly on the ground, even less experienced operators can stake out points in one go, without moving the pole back and forth.




### Super Datalink

Jupiter's compatibility has been further enhanced. The advanced datalink allows to work with all type GNSS receivers of ComNavTech and receivers of other mainstream brands, and supports a number of protocols, incl. Transparent /TT450S/South/Mac/SNLonglink. With SNLonglink, 15km working range is achievable under ideal conditions.



### Auto-IMU

Jupiter is equipped with Auto-IMU, eliminating the need for manual initialization, supporting automatic calibration, and streamlining the operations in the field. It continues to support 120° compensation in conventional, laser and visual modes.



### Full-Constellation Multi-Frequency

With 1668 channels and 60+ satellite tracking capabilities, Jupiter also supports HAS&B2b PPP service. Getting fixed in seconds boosts your productivity.



# Jupiter Laser Visual RTK

Jupiter Laser Visual RTK is a high-end GNSS receiver that integrates cutting-edge GNSS, IMU, Laser and dual-camera technologies. Building on the advanced laser technology of the Universe Series, Jupiter also incorporates SinoGNSS's latest visual stake-out technology. This combination brings out immersive surveying and stakeout experiences, even in previously hard-to-reach, signal-blocked, or dangerous field.

Equipped with the latest K8 platform, Jupiter tracks 1668 channels for all running and existing constellations. The built-in IMU sensor supports up to 120° tilt compensation, in conventional, laser and visual mode.



# R60 Data Collector

