


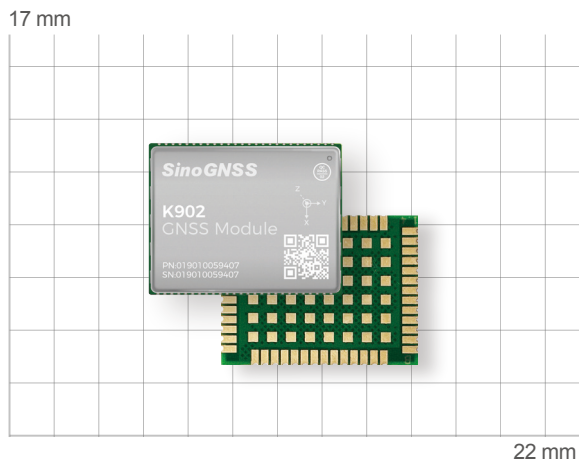

Size(W × L × H): 17 mm × 22 mm × 2.5 mm

Weight: 1.9 g

Features

Support GPS, BDS-2, BDS-3, GLONASS, GALILEO, NAVIC, QZSS and SBAS

RF&BB Integrated High-Precision GNSS SoC Chip

Brand New Dual Core CPU Structure

Support PPP-B2b, PPP-HAS Service

Support GNSS+INS Navigation

Support CAN & Network

Application



SinoGNSS

K902 GNSS Module

Next-Gen QC7820 SoC Technology

The K902 integrates ComNav's cutting-edge QC7820 SoC chip, delivering industry-leading GNSS precision. It supports full-constellation tracking and provides centimeter-accurate positioning through advanced floating-point processing for unmatched reliability in demanding applications.

Onboard IMU for Reliable Navigation

The K902 integrates a high-precision IMU module, enabling seamless RTK positioning through GNSS/INS fusion. Its advanced inertial navigation algorithm maintains continuous high accuracy positioning even during GNSS signal outages.

Multi Anti-Interference Technologies

The K902 module features an advanced internal adaptive anti-interference system incorporating wideband reception, narrowband suppression, and continuous-wave rejection technologies. Its intelligent algorithm effectively mitigates all types of RF interference, ensuring high-quality observation data even in the most challenging electromagnetic environments.

Multi-interfaces Supported

The K902's integrated CAN and Ethernet interfaces deliver both industrial-grade communication reliability and high-speed data exchange capabilities.

K902 GNSS Module

K Series GNSS Module

Ver.2025.06.17

Signal Tracking

Channels	1688
GPS	L1C/A, L2P, L2C, L5, L1C
BDS-2	B1I, B2I, B3I
BDS-3	B1I, B3I, B1C, B2a, B2b
GALILEO	E1, E5b, E5a, E5 AltBoC*, E6c*
GLONASS	G1, G2, G3*
SBAS	L1C/A, L5
QZSS	L1C/A, L2C, L5, L1C
NAVIC*	L5

Performance Specifications

Cold Start	< 20 s (Adding Acceleration Capture Module)
Hot Start (with RTC)	< 10 s (Typical)
RTK Initialization Time	< 5 s (D < 10km)
Signal Reacquisition	< 1 s
Initialization Reliability	> 99.9%
Velocity Accuracy	≤ 0.02 m/s
Time Accuracy	20 ns
PPP Convergence Time	<15 min ¹

Inertial Sensor Specifications

Gyroscope	Range: ± 125°/s
	Bias Repeatability: 0.5°/s
	Bias Stability: 5°/h
	Angular Random Walk: 0.12°/√h
Accelerometer	Range: ± 2g
	Bias Repeatability: 20 mg
	Bias Stability: 50 μg
	Velocity Random Walk: 0.07 m/s/√h

Positioning Specifications

Post Processing	2.5 mm + 1 ppm Horizontal
	5 mm + 1 ppm Vertical
Single Baseline RTK	8 mm + 1 ppm Horizontal
	15 mm + 1 ppm Vertical
DGPS	< 0.4 m RMS
SBAS	1 m 3D RMS
Standalone	1.5 m Horizontal; 3 m Vertical
PPP	0.1 m Horizontal; 0.2 m Vertical
ADR Position Error	<3% of distance travelled without GNSS

Communications Interfaces

UART	2
UART3 or CAN (optional)	1
I2C	1
SPI	1
EVENT	1
PPS	1
ETH	1 (Corresponding Pin is 24, 25, 28, 29)

Data Format

Correction Data I/O	RTCM 2.X, 3.X
Position Data Output	-ASCII (NMEA-0183): GGA, GSA, GSV, RMC, HDT, VHD, ZDA, VTG, GST, GLL
	-Binary: ComNav Binary
	-Position Output Rate: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz*, 50 Hz*
	-IMU Data Rate: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz*, 50 Hz*, 100 Hz*

Antenna Interface

Impedance Match	50 Ω
LNA Power (External)	+ 3.3 V ~ + 5 V ± 5%VDC @ 0-100 mA
LNA Gain	20 ~ 35 dB (Suggested)

Physical

Size (W × L × H)	17 mm × 22 mm × 2.5 mm
Hardware Interface	LGA 54 pin
Weight	1.9 g

Environmental

Working Temperature	-40 °C to + 85 °C
Storage Temperature	-55 °C to + 125 °C

Electrical

Input Voltage	+ 3.3 V ± 5% DC
Power Consumption	0.4 W (Anti-interference off)

Software Tools

ComNav Compass Receiver Utility
Compass Solution Software

Note: Items marked with *are only support by specific firmware.

¹ The laboratory test results may be affected by experimental environment and are provided for reference purposes.

SinoGNSS

ComNav Technology Ltd.

Building 2, No. 618 Chengliu Middle Road,
201801 Shanghai, China

Web: www.comnavtech.com

Email: sales@comnavtech.com

Tel : +86 21 64056796 Fax: +86 21 54309582