

Technical Specifications

T30 IMU

- Signal Tracking
- 1198 channels for simultaneously tracking satellite signals
 - GPS: L1C/A, L2C, L2P, L5
 - BeiDou: B1I, B2I, B3I, B1C, B2a, B2b
 - GLONASS: L1, L2, L3
 - Galileo: E1, E5a, E5b, E6, E5 AltBOC
 - QZSS: L1C/A, L1C, L2C, L5
 - Navic: L5
 - SBAS: WAAS, EGNOS, MSAS, GAGAN, SDCM, BDSBAS
 - L-Band¹

Performance Specifications

- Cold start: < 50 s
- Warm start: < 30 s
- Hot start: < 15 s
- Initialization time: < 10 s
- Signal re-acquisition: < 1.5 s
- Initialization reliability: > 99.9%

Positioning Specifications

Mode	Accuracy
Static and Fast Static	2.5 mm + 0.5 ppm Horizontal 5 mm + 0.5 ppm Vertical
Long Observations Static	3 mm + 0.1 ppm Horizontal 3.5 mm + 0.4 ppm Vertical
Real Time Kinematic	8 mm + 1 ppm Horizontal 15 mm + 1 ppm Vertical
DGPS	< 0.4 m RMS
SBAS	1 m 3D RMS
Standalone	1.5 m 3D RMS
PPP	10cm Horizontal and 20cm Vertical

Communications

- 1 Serial port (7 pin Lemo)
 - Tx/Rx with full frequency range from 410-470MHz
 - Transmit power: 0.5W, 1W, 2W adjustable
 - Air Baud Rate: 9600/ 19200/ 11000 adjustable
 - Range: 3-15 km
 - Protocol type: support Transparent/TT450S/South/Mac/SNLonglink, compatible with all the ComNavTech GNSS Receivers
- WIFI: 802.11b/g/n
- 4G modem
 - LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28
 - LTE-TDD: B38/B39/B40/B41
 - WCDMA: B1/B2/B4/B5/B6/B8/B19
 - GSM: B2/B3/B5/B8
- Position data output rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz
- 5 LEDs (indicating Power, Satellite Tracking, GPRS Status and Differential Data)

- Bluetooth® : V 4.0 protocol, compatible with Windows OS and Android OS
 - Built-in IMU supports up to 60° tilt compensation
- Data Format
 - Correction data I/O:
 - RTCM SC104 Version 2.x, 3.x formats, CMR (GPS only), CMR+ (GPS only)
 - Position data output:
 - ASCII: NMEA-0183 GSV, RMC, HDT, VHD, GGA, GSA, ZDA, VTG, GST; PTNL, PJK; PTNL, GGK
 - ComNav Binary update to 20 Hz

- Physical
- Size (W × H): Φ 15.5 cm × 7.3 cm
 - Weight: 1.2 kg with two batteries

- Environmental
- Operating temperature: -40 °C to + 65 °C (-40 °F to 149 °F)
 - Storage temperature: -40 °C to + 85 °C (-40 °F to 185 °F)
 - Humidity: 100% non-condensing
 - Waterproof and dustproof: IP67, protected from temporary immersion to depth of 1 m
 - Shock: Designed to survive a 2 m drop onto concrete

- Electrical and Memory
- Input voltage: 7-28 VDC
 - Power consumption: 1.7 W⁵
 - Li-ion battery capacity: 2 × 3400 mAh, 7.4V, up to 24 hours typically
 - Memory: 8 GB⁶

- Software
- Survey Master Android-based data collection software
 - MicroSurvey FieldGenius field data collection software (optional)

1. PPP service is optional.
2. UHF modem is default configuration and it can be removed according to your specific needs.
3. Integrated UHF ranges from 410 to 470 MHz with 12.5 KHz channel spacing.
4. Working distance of internal UHF varies in different environments, the maximum distance is 5 Km in ideal situation.
5. Power consumption will increase if transmitting corrections via internal UHF.
6. 8GB is the default internal memory and optional 16GB, 32GB is available to order. Please clarify when placing the order.


Specifications subject to change without notice.

© 2025, ComNav Technology Ltd. All rights reserved. **SinoGNSS** is the official trade mark of ComNav Technology Ltd., registered in People's Republic of China, EU, USA and Canada. All other trademarks are the property of their respective owners. (August, 2025).


SinoGNSS

To make your work easier is our original motivation


T30
IMU
GNSS Receiver




FULL CONSTELLATION




BUILT-IN 4G/TX & RX




WiFi




BUILT-IN IMU




RUGGED AL-MG ALLOY HOUSING




TWO 3400MAH HOT SWAP BATTERIES




IP67



8GB Memory





SUPPORT L-BAND AND PPP



COMPATIBLE WITH OTHER BRANDS GNSS RECEIVER

Works with:



Survey Master 

SinoGNSS T30 IMU GNSS Receiver is an extremely compact designed receiver, tracking all current and future GNSS constellations, as well as L-Band capability. Featuring built-in IMU for high convenience and efficiency, abundant 4G/WIFI/Bluetooth® communications for flexibility, advanced QUANTUM™ technology for positioning reliability and stability, the T30 IMU receiver is the best-in-class solution for any of your survey tasks.

- High-sensitive Full-constellation Tacking Antenna
- Anti-electromagnetic Interference Shield
- Advanced All-in-one GNSS OEM Board
- Up to 60° Tilt Compensation Built-in IMU

● Magnesium-aluminium casing

7.3 cm

15.5 cm

● Clear Front Panel

UHF Connector

7-pin Lemo Port

SIM Card Slot

Two 3400mAh hot swap batteries

FULL-CONSTELLATION TRACKING

1198 channels tracking all working and planned GNSS constellations.

ADJUSTABLE TX & RX INTERNAL UHF*

Integrated UHF ranges from 410 to 470 MHz with 12.5 KHz channel spacing.

HOT SWAP BATTERY

Two 3400mAh hot swap batteries ensure you fluent workflow in the field.

SUPPORT LBAND

Support L-Band and PPP, gives one more choice for diverse surveying tasks.

BUILT-IN IMU

Built-in IMU provides a more efficient, convenient and reliable surveying solution for your field work.

SEAMLESSLY WORK WITH NETWORKING RTK POSITIONING

Its built-in 4G modem ensures the T30 IMU receiver perfectly works with all kinds of CORS worldwide.

WIFI CONNECTION

WebUI offers simple configuration, operation, status check of the T30 IMU receiver.

USB MODE

When connecting the T30 IMU receiver to your PC, you just copy the logged static data from the receiver to your PC.

* UHF is removable according to specific regulation in different countries.

DATA COLLECTOR




R50 DATA COLLECTOR

- 4+64GB Memory, Android 12 Operation System
- New Exterior Design, Customized for Engineers, More Comfortable Hold
- Large Capacity 7000mah Battery, QC3.0 Quick Charging
- IP67 Waterproof and Dustproof & Survive a 1.5m Drop
- Classic 9-Key and Center Measurement Shortcut Speed Up Working Efficiency
- 5.5-Inch Sunlight Readable Screen, 720*1280 Resolution
- Advanced NFC and 5.0 Dual-Mode Bluetooth



FIELD SOFTWARE

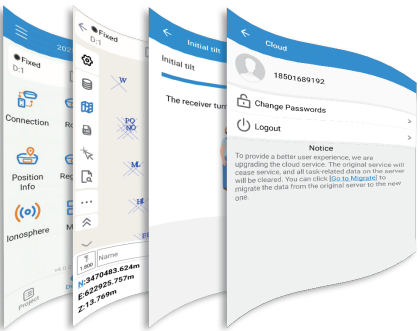


SURVEY MASTER

- Compatible with most of Android devices
- Easier survey workflow via Wizard function
- Support up to 60° IMU tilt compensation
- Support all survey modes, including Static, PPK and RTK
- Support Surface Stake, Mapping Survey and etc. to serve various survey tasks
- Support CAD import and directly use for stake out operations
- Support Convert function from ComNavBinary raw file to RINEX

Optional ▶ [Microsurvey FieldGenius](#)

POST-PROCESSING SOFTWARE

SINOGNSS COMPASS SOLUTION SOFTWARE

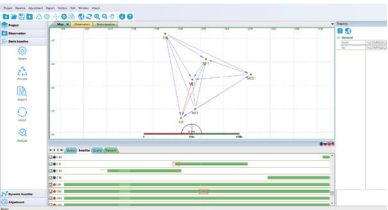

- Provide the complete GPS/GLONASS/BeiDou/GALILEO post-processing solution
- Support GNSS observation data in RINEX and ComNav Raw Binary Data formats
- Support different post-processing in static and kinematic modes
- Output analysis reports in various formats (web format, DXF, TXT, KML)
- Supports DJI's P4R data format. Processing results can be imported into photogrammetry and 3D modeling software directly